

Important:

Availability of the software update service from Schüco Digital GmbH

To ensure that the software for the **Schüco Product Configurator** can be kept up to date, the **Schüco Product Configurator** must be able to directly access the following **internet server**:
<https://schueco-digital-products.azurewebsites.net>.

Step 1:

Start the computer / Log in as user

- Start the computer.
- Log in with the user name SPC-User.

The following screen will appear:



Run Schüco Product Configurator

as a stand-alone application (Step 2a) or in a network (Step 2b)?

Only in a **network** is it possible to carry on working on a project from the **Schüco Product Configurator** on another desktop straightaway (without manually exporting and importing the project). We therefore recommend this set-up.

This **requires** all desktop to have the **identical version** of **SchüCal**.

If you want to have a **network group**, skip Step 2a and continue with **Step 2b** to set up the network.

For installation as a **single location solution**, carry out **Step 2a** and skip Step 2b.

Step 2a:



Set-up as a single location solution:

Transfer of data from you SchüCal configuration.


- Copy your data from the existing SchüCal installation onto a USB stick.

In the **SchüCal login dialog box**, click the button with the three dots next to the configuration settings. This will take you to the Desktop settings dialog box, which displays the directories that are to be copied.


Copy the User Data and Contacts directories to the USB stick.

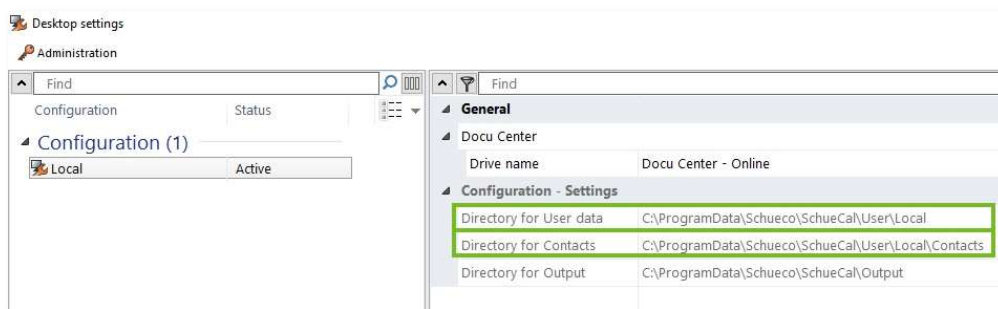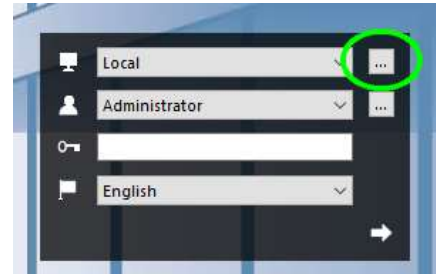

- Then connect the USB stick to the **PC** with the **Schüco Product Configurator**.
- Now open the **SchüCal Toolbox** to open the configuration directory.

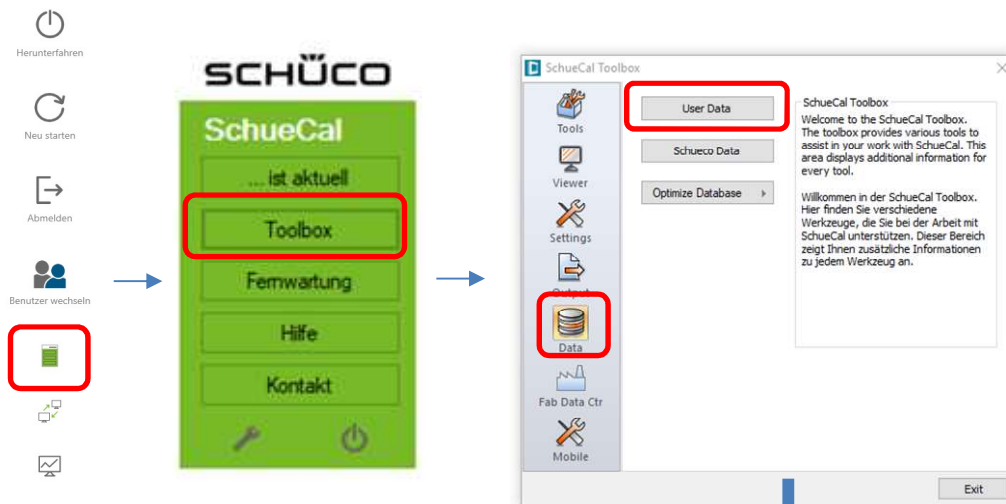

- **Copy** the directories (which you copied onto the stick earlier) from the USB stick to the **opened configuration directory**.

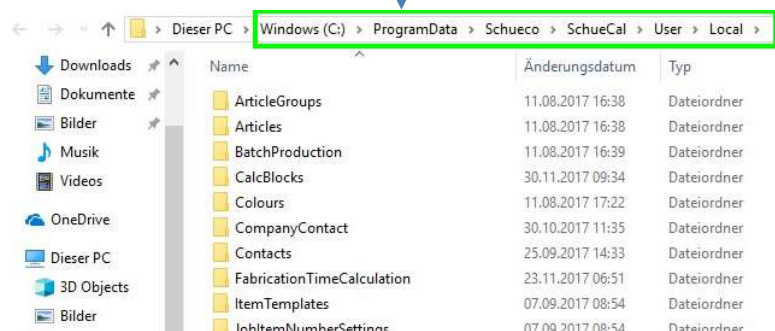

Step 2b:


Connection to an existing network set-up

If you are already using SchüCal with a network configuration, it is advisable to also set up a network configuration for the **Schüco Product Configurator** which accesses the same data.


Requirement:

All SchüCal installations which use the same network configuration must be on the **same version**. If the **Schüco Product Configurator** requires a particular version of SchüCal, all other PCs which work with the same network configuration must have this SchüCal version installed.

You can find out which version of SchüCal you have in the **Basic settings** of the **Schüco Product Configurator**:

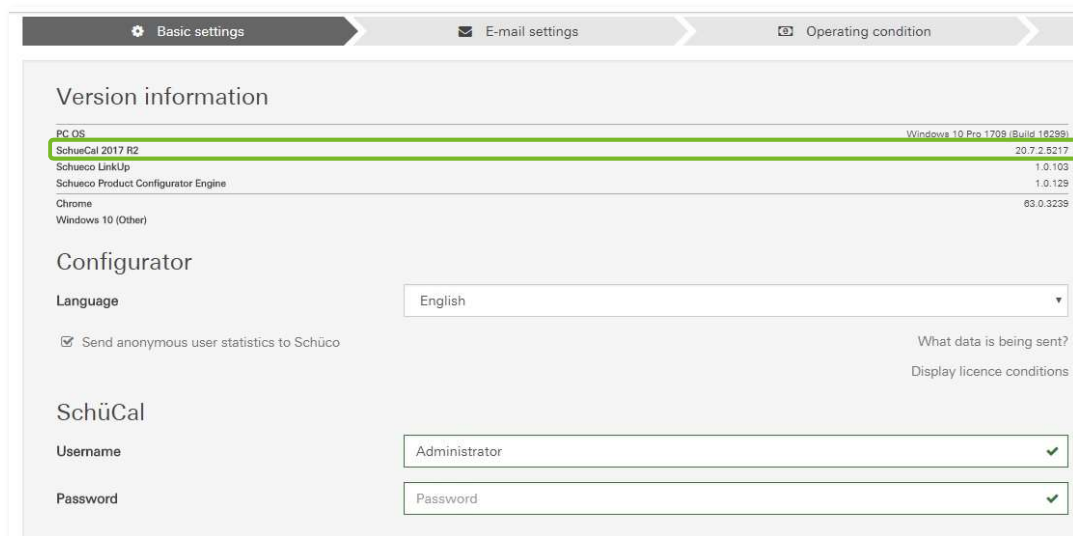

- To connect the SchüCal of the **Schüco Product Configurator** to the network, set up the Desktop settings with the network paths in SchüCal. **Do not change the user name and password.**

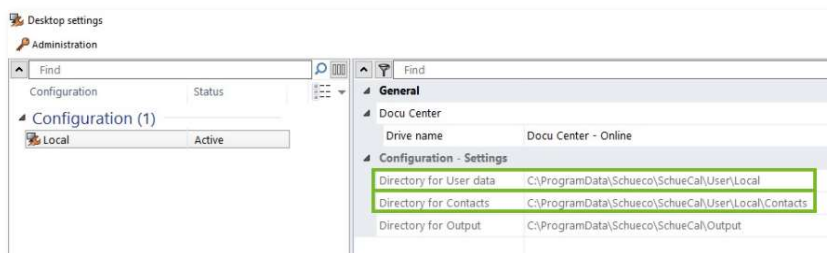


Step 3:

Copy your company logo

To make your company's logo appear on the **quotation** generated by the **Schüco Product Configurator**, carry out the following steps:

- Copy your company logo to a USB stick in JPG or PNG format. Name the file logo.jpg or logo.png.
- Connect the USB stick to the PC with the **Schüco Product Configurator**. Now open the **SchüCal Toolbox**:

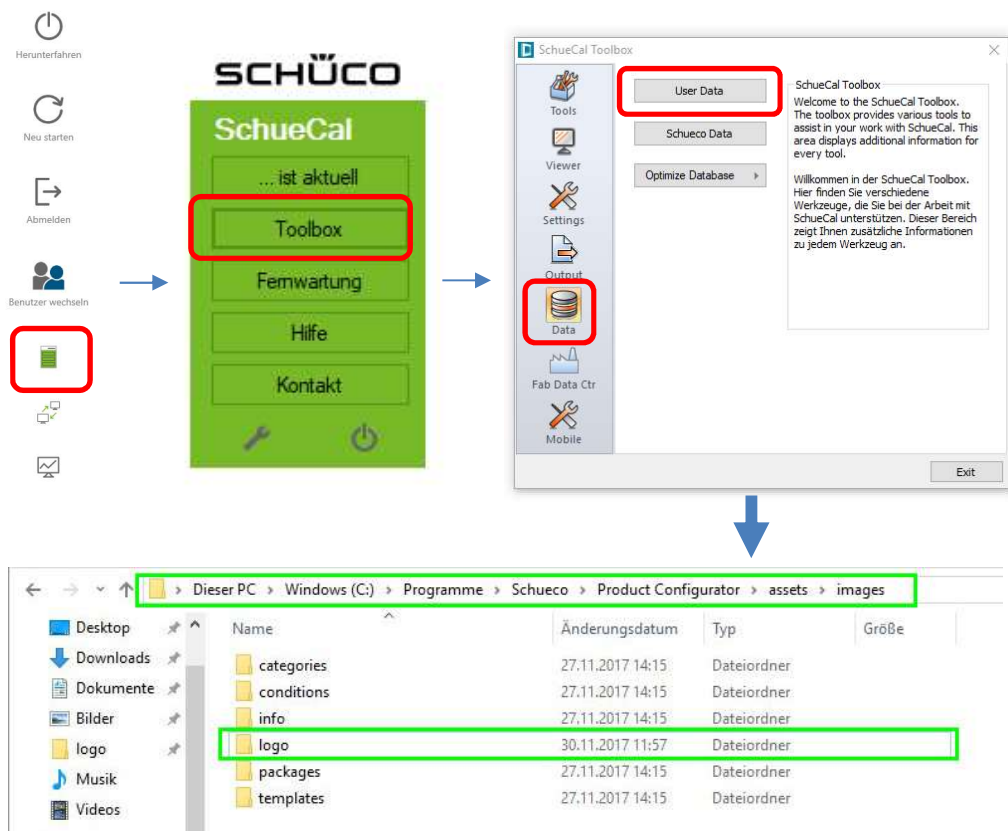

- Within the installation directory for the **Schüco Product Configurator** (C:\Programme\Schueco\Product Configurator), switch to the assets/images/logo directory.
- Now copy the logo file from your USB stick **to this directory**.

Step 4: Tablet set-up

Note:

Make sure the tablet is fully charged **before commissioning**.

- 4.01 **Turn on the tablet:**
Turn on the tablet using the lock button (top left of the device). Hold the button down until the start screen appears.
- 4.02 **Language:**
Select your language and press Next to confirm.
- 4.03 **Wireless network:**
Please skip this step by confirming with Next without connecting to a wireless network.
- 4.04 **Terms and conditions:**
Accept the terms and conditions by pressing Next.
- 4.05 **Add account:**
Press Skip.


- 4.06 **Privacy and conditions:**
Agree to the conditions.
- 4.07 **Your Google account:**
Press Next.
- 4.08 **Google services:**
Deactivate the Use Location and Support services and press Next.
- 4.09 **Payment method:**
Select No thanks and press Next to confirm.
- 4.10 **Date and time:**
Set the date and time and press Next to confirm.
- 4.11 **Set up e-mail:**
Confirm by clicking Later.
- 4.12 **Protect device:**
Press Skip.
- 4.13 **Samsung account:**
Press Skip.
- 4.14 **Weather forecast:**
Press Next, then press Agree.
- 4.15 **My KNOX:**
Press FINISH.
- 4.16 **Wireless network:**

Setting up access on the tablet

- a. Please press the Settings icon.



- b. In the settings, select Connections:

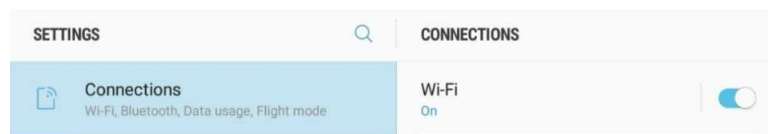


- c. Select the wireless network which is listed next to SSID (1) on the sticker on the router.
- d. Connect to the network with the password listed next to Wireless Password/PIN (2).



- 4.17 Now start **Google Chrome**.
Enter the following address: **http://192.168.0.99**



4.18 Add the **Schüco Product Configurator** to the **home screen** via the Add to home screen menu item:



4.19 Now close Google Chrome.
Use the new **icon** to start the **Schüco Product Configurator**.

The **Schüco Product Configurator** is now ready to start.

Tip:

Make sure you watch the **video** that comes up at the start so you can familiarise yourself with how to use the **Schüco Product Configurator**.